


Adapter frame for rooflights for installing in vans

mpk

MPK Metall- und
Plastikverarbeitung GmbH & Co. KG
Friedrich-Ebert-Str. 298-300
D-58566 Kierspe

mpk-rooflights.com

7050ARW

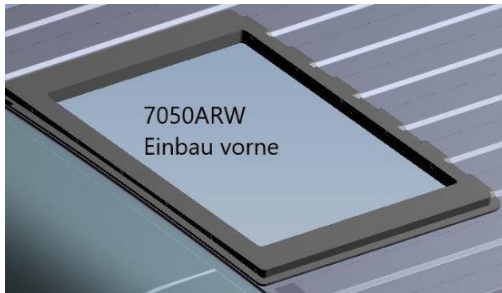


Technical data:

Aperture size	700 x 500 mm
Installation position	front
Corner radius	12 mm
Height over roof	7 mm
Material	Polypropylene
Compatible with	Fiat Ducato Citroën Jumper Peugeot Boxer



7050ARW1

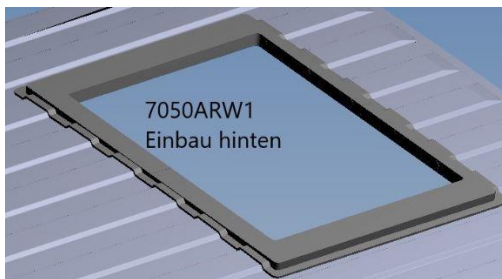

Technical data:

Aperture size	700 x 500 mm
Installation position	back
Corner radius	12 mm
Height over roof	7 mm
Material	Polypropylene
Compatible with	Fiat Ducato Citroën Jumper Peugeot Boxer

EN Fitting Instruction

Included with delivery

1x Adapter frame

Additionally required for installation (not included in delivery)

Permanently elastic sealant for installing the Adapter frame to the roof of the vehicle, e.g. Dekalin Dekaseal 1512 or SikaLastomer-710.

Installation



Please clean the frames carefully before mounting the sealant.



Follow the instructions of the sealant manufacturer.

Fit the Adapter frame to the outside of the roof aperture onto a bed of sealant.



We cannot be held responsible for incorrect fitting, handling or operation.

Any product faults relating to the production and materials used should be notified to us via an authorised dealer immediately.